



PORTABLE MULTI GAS MONITOR

MODEL GX-8000



◆ Application

- Confined space
- Refineries/Petrochemical/Chemical plants
- Oil tanker/Gas carrier/Bulk carrier
- Chemical tanker
- Water/Wastewater treatment
- Fire services
- Telecommunication services
- Power plant
- Gas plant/Gas supplier services
- Utilities
- Coating field
- Fuel cell facilities

◆ Features

- Real-time detection of max. 5 ranges Combustibles 100vol%/100%LEL, O₂, H₂S & CO
- Large simultaneous display with auto back lighting
- Strong sample drawing capability
- Loud alarm buzzer with 95dB
- 3 bright LED alarm windows
- ATEX Exia II CT4 approved / MED approved
- Water and dust resistant IP67
- Lithium-ion rechargeable battery
- Compact and light weight
- Ergonomic design with waist strap for hands free operation
- Datalogging standard



ISO 9001 950R-007
ISO 14001 97ER-005
TOKYO PLANT • OKEGAWA MANUFACTURING
DIVISION • HAKODATE FACTORY

RIKEN KEIKI

COMPONENT DESIGNATIONS

The GX-8000 sets the new industry standard for rugged, reliable portable gas detection. It's tough, water proof design utilized features based on years of gas detection design experience, to assure that the instrument will operate properly to protect workers and property in all kinds of harsh gas detection applications.

LCD display

Large display shows all gases simultaneously

Alarm lamps

Three bright LED indications

Audible alarm

Loud distinct tone, 95dB with two openings

Switches

Easy operation and control with four switches

IrDA port

Combustible
(100vol%)

Combustible
(100%LEL)

Waist strap fitting

Optional

Sample gas
inlet

Sample gas
outlet


Charging port



Display screen example

Side view

Rear view

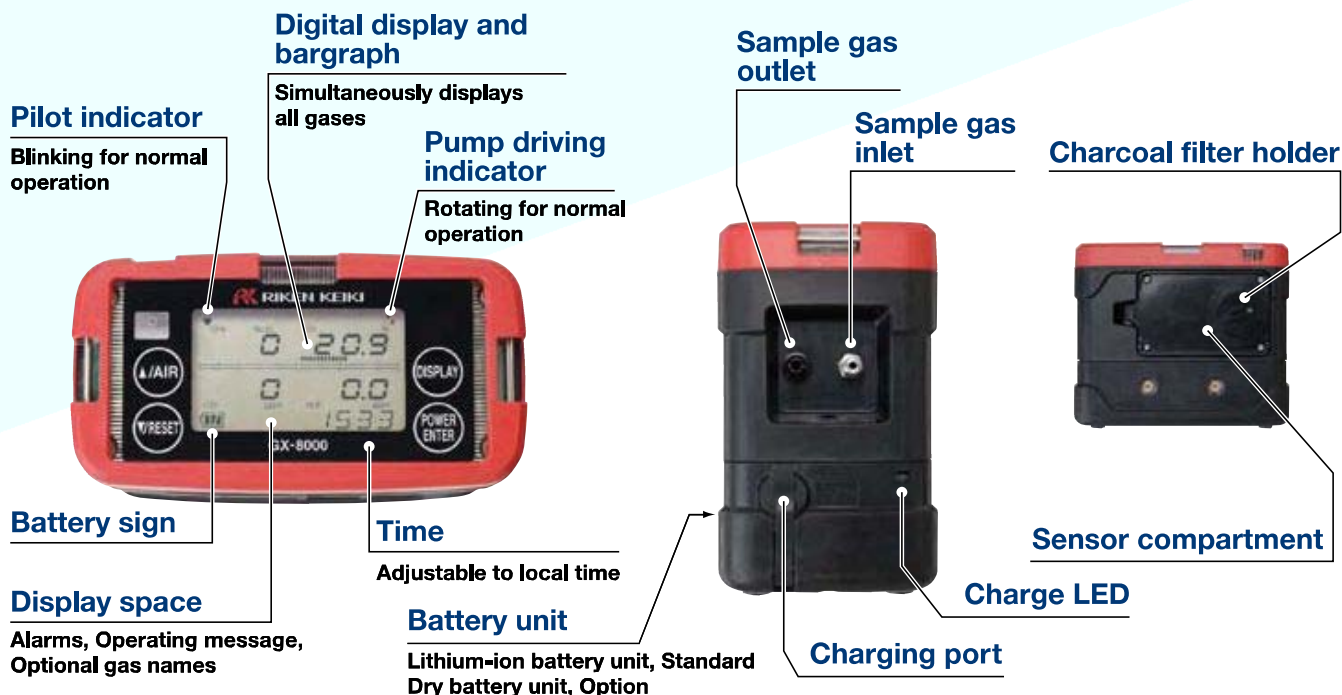

Direct readout combustibles

Standard	LEL	Detection range
iso-Butane i-C ₄ H ₁₀	1.8vol%	0-100%LEL / 0-100vol%
Methane CH ₄	5.0vol%	0-100%LEL / 0-100vol%
Hydrogen H ₂	4.0vol%	0-100%LEL / 0-100vol%

Option (factory setting)	LEL	Detection range
Acetylene C ₂ H ₂	1.5vol%	0-100%LEL
Methylalcohol CH ₃ OH	5.5vol%	0-100%LEL
MEK CH ₃ COC ₂ H ₅	1.8vol%	0-100%LEL
n-Hexane CH ₃ (CH ₂) ₄ CH ₃	1.2vol%	0-100%LEL
Toluene C ₆ H ₅ CH ₃	1.2vol%	0-100%LEL

LEL values according to the directive by TIIS edition RIIS-TR-79-1 in 1979.
TIIS : Technology Institution of Industrial Safety

Data logger download via IrDA communication



GX-8000 gas combinations available

		Combustibles 0-100vol%	Combustibles 0-100%LEL	O ₂ 0-40.0%	H ₂ S 0-100.0ppm	CO 0-500ppm
Four gases/ Five ranges	Type-A	●	●	●	●	●
Four gases	Type-B		●	●	●	●
Three gases	Type-C		●	●	●	
	Type-D		●	●		●
Two gases/ Three ranges	Type-E	●	●	●		
Two gases	Type-F		●	●		

Please specify gas combinations when ordering

Target gas	Combustibles (CH ₄ , i-C ₄ H ₁₀ , H ₂ , others)		Oxygen (O ₂)	Hydrogen sulfide (H ₂ S)	Carbon monoxide (CO)
Detection principle	Thermal conductivity	Catalytic combustion	Galvanic cell	Electrochemical	Electrochemical
Detection range (Increments)	0-100vol% (1vol%)	0-100%LEL (1%LEL)	0-40.0% (0.1%)	0-100.0ppm (0.5ppm)	0-500ppm (1ppm)
Gas alarm	N/A	1st : 10%LEL 2nd : 50%LEL	Low alarm : 19.5% High alarm : 23.5%	1st : 5.0ppm 2nd : 30.0ppm TWA : 10.0ppm STEL : 15.0ppm	1st : 25ppm 2nd : 50ppm TWA : 25ppm STEL : 200ppm
Types of alarm	Gas alarm : Latching, 2 alarms Failure alarm : Flow failure, Sensor failure, Battery failure, Circuit failure, Calibration failure				
Display of alarm	LED : LED's flash Buzzer : Buzzer sounds alternating between a low and high pitch Visual indication : Indication value flashes. Alarm message displays and flashes.				
Alarm sound	More than 95dB (A) at 30cm				
Display	Digital LCD with auto backlight Digital display (7 segments) and digital bargraph (25 segments)				
Sampling method	Sample Draw, Minimum 0.75L/min				
Power source	Lithium-ion battery, Standard (3 hours for a full charge) AA Alkaline battery (3pcs), Option				
Continuous operation	Lithium-ion battery : more than 12 hours AA Alkaline battery : more than 6 hours				
Operating temp & humidity	-20~+50°C, -4~+122°F below 95%RH (Non-condensing)				
Dimensions & Weight	Approx. 154(W) × 81(H) × 130(D) mm, Approx. 1.1kg Approx. 6.1"(W) × 3.1"(H) × 5.0"(D), Approx. 2.4lb				
Ingress proof rating	Equivalent to IP67				
Explosion proof	Intrinsically safe Exia II CT4				
Approvals	IECEX, ATEX, TIIS MED, HK, CE mark Complying to IEC60079-29-1				
Additional features	Indication to show energizing (pilot indicator and pump driving indicator), "Activating confirmation beep and LED's flash (every one min)" Pump stop function, Bump test function, IrDA communication, Data logger, Password protection				

Specifications subject to change without notice

Standard accessories

- AC powered charger
(Input : AC100V~AC240V, 50/60Hz)
(Output : DC12V, 1.25A)
- Gas sampling probe
- Gas sampling hose (Spiral 1m)
- Lithium-ion battery unit BUL-8000
- Neck/shoulder strap
- Instruction manual

Optional accessories

- Dry battery unit BUD-8000
- Gas sampling hose 8m with float type sampling head
- Gas sampling hose 30m with plummet
- Telescopic sampling rod
(9step : 3.0m / 2step : 0.72m)
- Filter tube
- Junction tube
- Diluter adapter (for bulk carrier application)
- Waist strap
- Sampling probe holder on the neck/shoulder strap
- Leather carrying case
- Storage box for marine use
- Carrying box
- Calibration gas set
- Flow control demand valve
- Datalogging software

RIKEN KEIKI Co.,Ltd.

2-7-6 Azusawa, Itabashi-ku, Tokyo 174-8744, Japan

Phone : +81-3-3966-1113

Telefax : +81-3-3558-9110

E-mail : intdept@rikenkeiki.co.jp

Web site : <http://www.rikenkeiki.co.jp>

★ Distributed by:



CÔNG TY TNHH MTV MÁY ĐO KHÍ VIỆT NAM

79 Lý Chính Thắng, phường 8, quận 3, Tp.HCM

Tel : (08). 3526 2987

Fax : (08). 3526 2980

Email : info@vina-gasdetector.vn

Web : www.vina-gasdetector.vn